


ENGINEERED LIFTS & SPREADER BARS

1. Connecting links will be used to secure sliding sleeves during lifting by connecting chain and shackles in 9 places.
2. Rigging components may be substituted by items that provide the minimum safe working load (SWL).
3. This rigging arrangement shall be load tested to project specifications prior to field use.



Item	Qty	Description	Min SWL
1	1	2" A-342 Crosby Master Link	95 kips
2	2	IWRC - Length 64 ft	55 kips
3	4	1 3/4" G-2130 Shackle	25 tonne
4	2	3/4" Spectrum 8 Chain (43 ft)	27 kips
5	8	1 1/4" G-2130 Shackle	12 tonne
6	8	3/4" A-1337 Connecting Link	27 kips
7	4	IWRC - Length 32 ft	45 kips
8	4	1 3/4" G-2130 Shackle	25 tonne
9	4	Soft sling grommit nylon (12 ft)	25 tonne

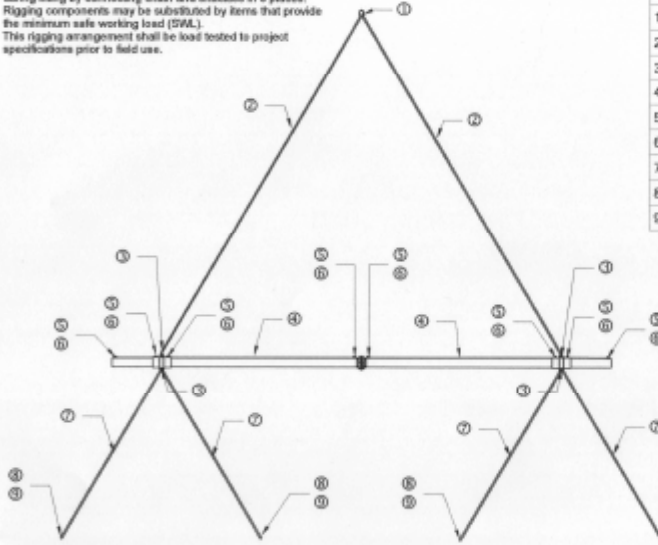

4310 FM 2218
Richmond, TX 77469
ph. 281-232-9477
fx. 281-232-9407

NOTICE OF CONFIDENTIALITY


THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN COMPRISE PROPRIETARY INFORMATION OWNED SOLELY BY EDAM. THIS DOCUMENT IS PROVIDED SUBJECT TO THE PROVISION THAT THE INFORMATION HEREIN WILL NOT BE DISCLOSED OR REPRODUCED UNLESS SPECIFICALLY AUTHORIZED IN WRITING BY EDAM NOR WILL BE USED IN ANY WAY DETRIMENTAL TO OR IN COMPETITION WITH INTEREST OF EDAM. THIS DOCUMENT, REPRODUCTIONS PREVIOUSLY AUTHORIZED IN WRITING AND ASSOCIATED INFORMATION SHALL BE RETURNED WHEN THEY HAVE SERVED THEIR INTENDED PURPOSES, OR ON DEMAND.

DRAWN: B. Janak
CHECKED:
DATE: 6/29/2009
QA:
APPROVED:

Spreader Bar Rigging Arrangement

SCALE: 1 - 200
DWS NO. DCL-REM-200-DWG-ST-1030-05
REV: 0

MULTI-PART BRAIDED SLINGS

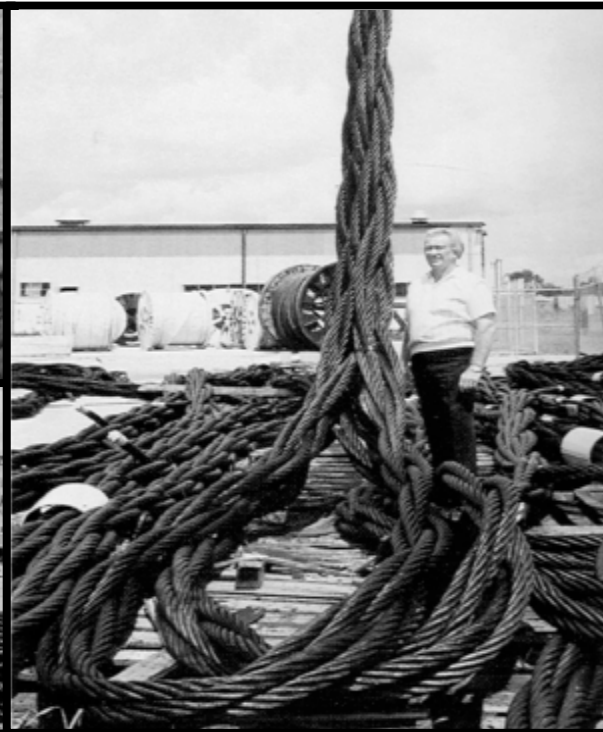

ISO Certified

