


TYPE 1

All Purpose Slings Tapered Sleeve & Attachments

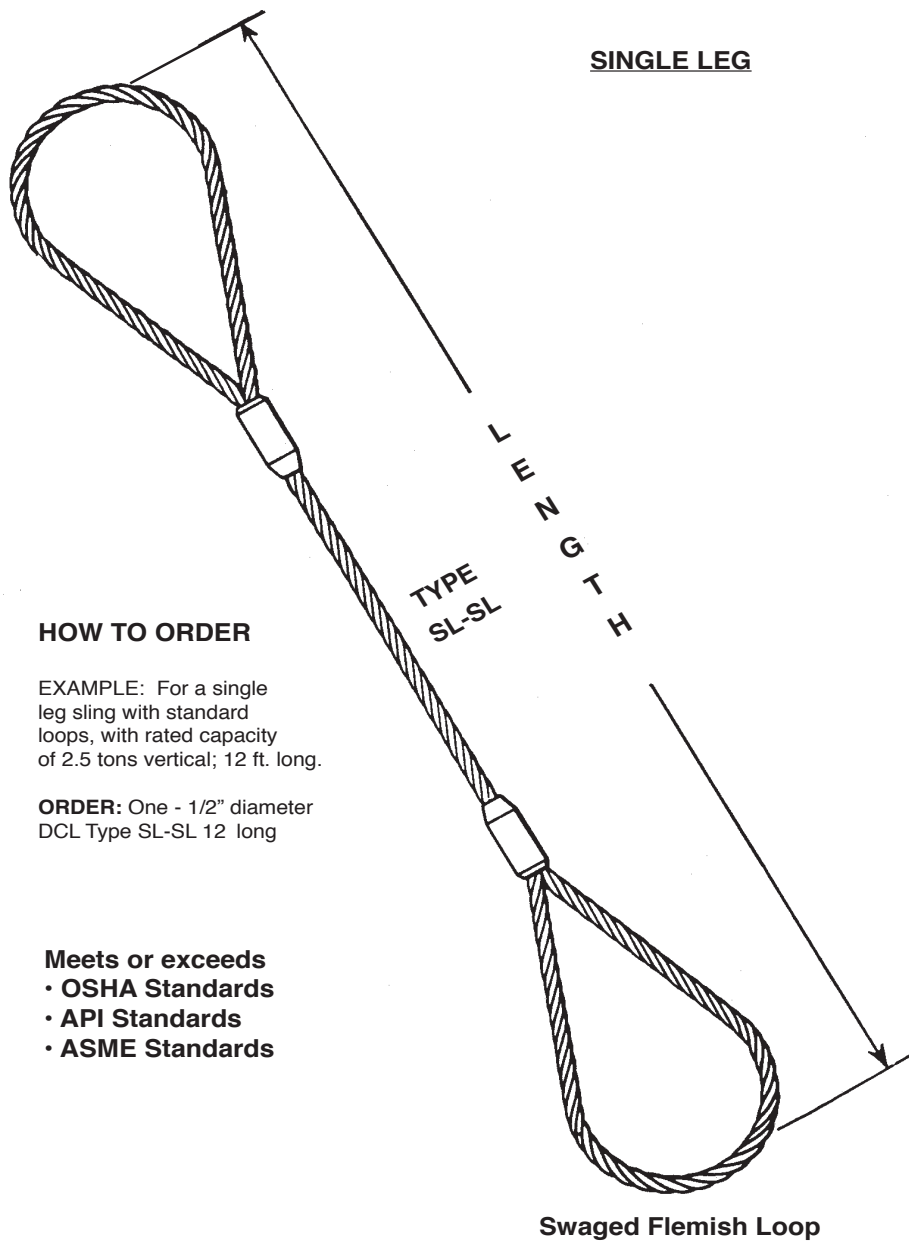

HOW TO ORDER

EXAMPLE: For a single leg sling with standard loops, with rated capacity of 2.5 tons vertical; 12 ft. long.

ORDER: One - 1/2" diameter
DCL Type SL-SL 12 long

- Meets or exceeds
- OSHA Standards
 - API Standards
 - ASME Standards

TYPE 1

One Part Slings

Mechanical Splice - IWRC

Vertical, Choker or Vertical Basket

Rated capacity in tons of 2,000 lbs.

Rated capacities shown apply only to 6x19 and 6x37 class wire rope

ROPE DIAMETER (INCHES)	VERTICAL		CHOKER		VERTICAL BASKET	
	EIPS	EEIPS	EIPS	EEIPS	EIPS	EEIPS
1/4	0.65	0.71	0.48	0.52	1.3	1.4
5/16	1.0	1.1	0.74	0.81	2.0	2.2
3/8	1.4	1.6	1.1	1.2	2.9	3.2
7/16	1.9	2.1	1.4	1.6	3.9	4.3
1/2	2.5	2.8	1.9	2.0	5.1	5.5
9/16	3.2	3.5	2.4	2.6	6.4	7.0
5/8	3.9	4.3	2.9	3.2	7.8	8.6
3/4	5.6	6.2	4.1	4.5	11	12
7/8	7.6	8.3	5.6	6.1	15	17
1	9.8	11	7.2	8.0	20	22
1 1/8	12		9.1		24	
1 1/4	15		11		30	
1 3/8	18		13		36	
1 1/2	21		16		42	
1 5/8	24		18		49	
1 3/4	28		21		57	
1 7/8	32		24		64	
2	37		28		73	
2 1/8	40		31		80	
2 1/4	44		35		89	
2 3/8	49		38		99	
2 1/2	54		42		109	
2 5/8	60		46		119	
2 3/4	65		51		130	
2 7/8	71		55		141	
3	77		60		153	
3 1/8	82		64		165	
3 1/4	89		69		177	
3 3/8	95		74		190	
3 1/2	102		79		203	
3 3/4	***					
4	***					
4 1/2	***					

- Rated capacities basket hitch based on D/d ratio of 25
- Rated capacities based on pin diameter no larger than natural eye width or less than the nominal sling diameter
- Rated capacities based on design factor of 5
- Horizontal sling angles less than 30 degrees shall not be used
- Rated capacities based on new slings only

*** UPON REQUEST

Wire Rope Technical Board - Wire Rope Users Manual, Fourth Edition • 97

