
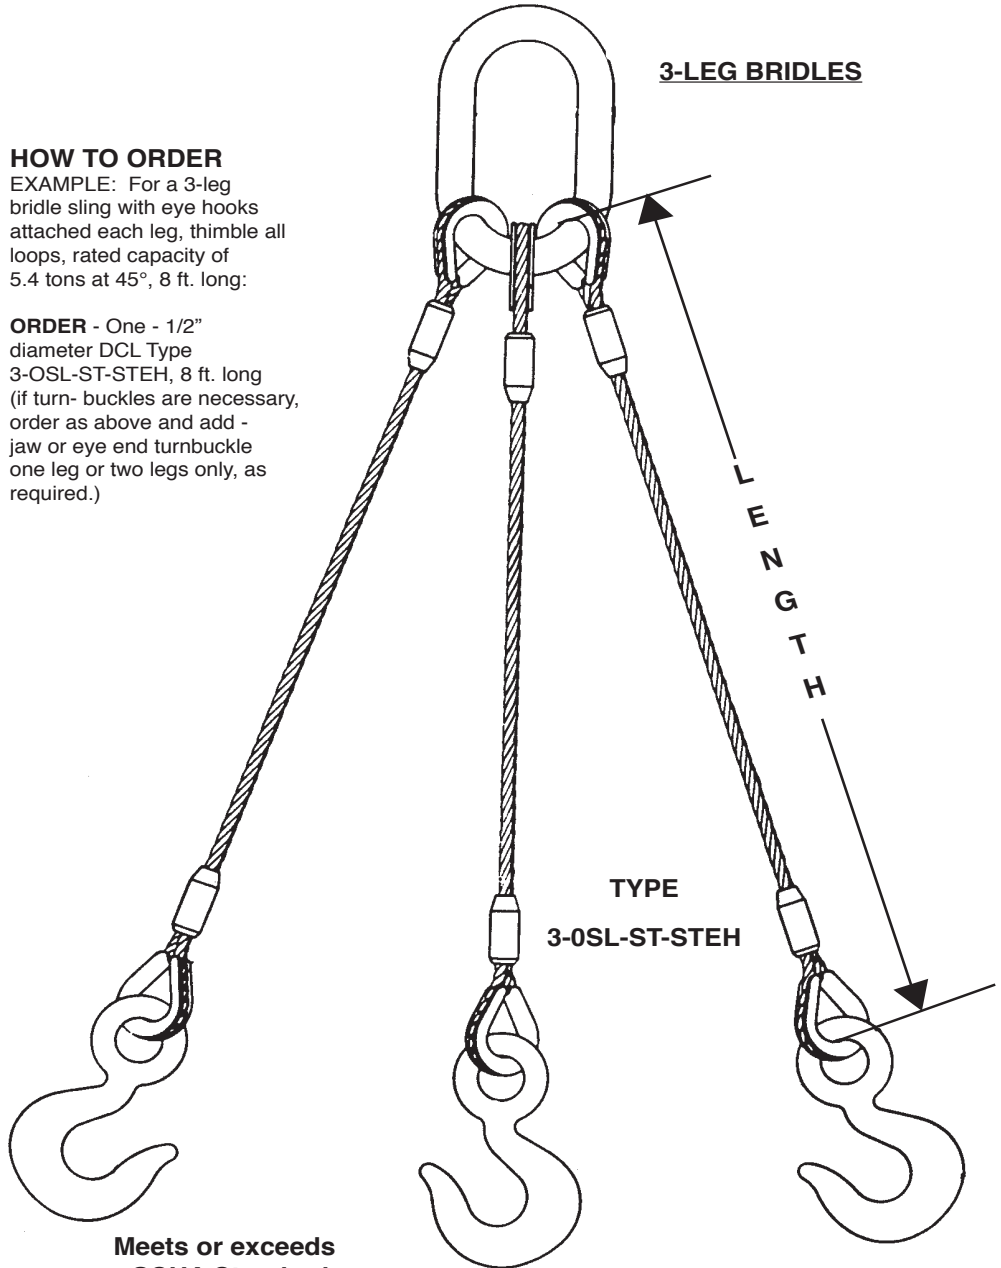


TYPE 3

All Purpose Slings Tapered Sleeve & Attachments

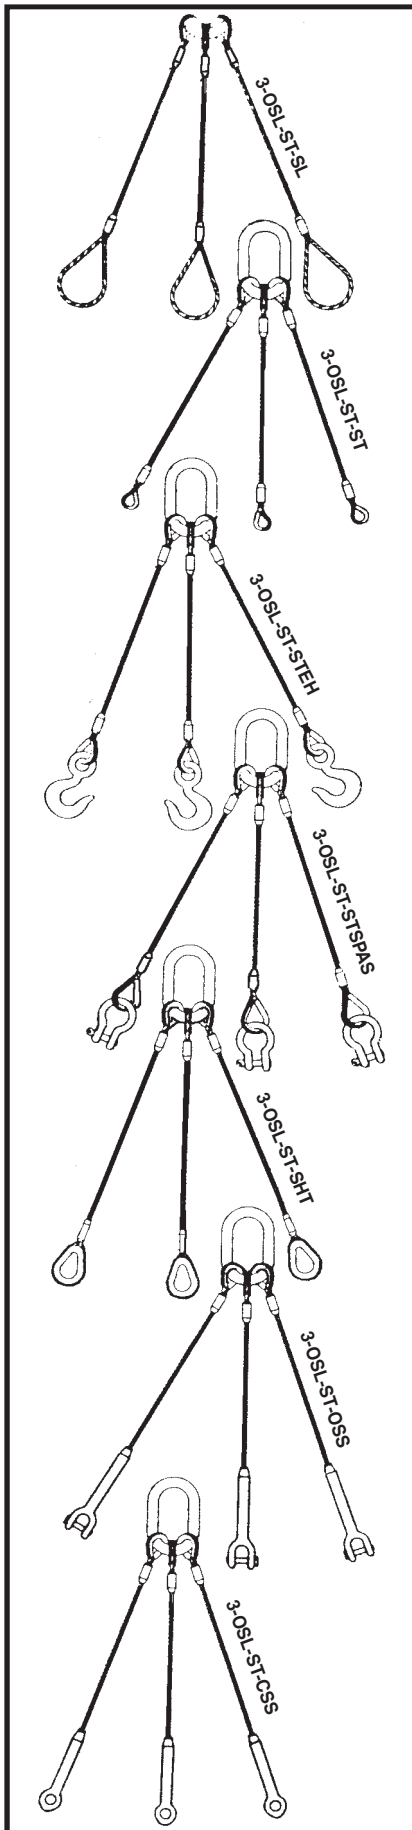

HOW TO ORDER

EXAMPLE: For a 3-leg bridle sling with eye hooks attached each leg, thimble all loops, rated capacity of 5.4 tons at 45°, 8 ft. long:

ORDER - One - 1/2" diameter DCL Type 3-OSL-ST-STE, 8 ft. long (if turn-buckles are necessary, order as above and add - jaw or eye end turnbuckle one leg or two legs only, as required.)

- Meets or exceeds
- OSHA Standards
 - API Standards
 - ASME Standards

TYPE 3

Mechanical Splice - IWRC

3 - Leg Bridle

Rated capacity in tons of 2,000 lbs.

Rated capacities shown apply only to 6x19 and 6x37 class wire rope

ROPE DIA. (IN.)	VERTICAL		60°		45°		30°	
	EIPS	EEIPS	EIPS	EEIPS	EIPS	EEIPS	EIPS	EEIPS
1/4	1.9	2.1	1.7	1.8	1.4	1.5	0.97	1.1
5/16	3.0	3.3	2.6	2.9	2.1	2.3	1.5	1.7
3/8	4.3	4.7	3.7	4.1	3.0	3.3	2.2	2.4
7/16	5.8	6.4	5.0	5.5	4.1	4.5	2.9	3.2
1/2	7.6	8.3	6.6	7.2	5.4	5.9	3.8	4.2
9/16	9.6	11	8.3	9.1	6.8	7.5	4.8	5.3
5/8	12	13	10	11	8.3	9.1	5.9	6.5
3/4	17	18	15	16	12	13	8.4	9.2
7/8	23	25	20	22	16	18	11	12
1	29	32	26	28	21	23	15	16
1 1/8	36		31		26		18	
1 1/4	44		38		31		22	
1 3/8	53		46		38		27	
1 1/2	63		55		45		32	
1 5/8	73		63		52		37	
1 3/4	85		74		60		42	
1 7/8	97		84		68		48	
2	110		95		78		55	
2 1/8	119		103		84		60	
2 1/4	133		116		94		67	
2 3/8	148		128		105		74	
2 1/2	163		141		115		82	
2 5/8	179		155		126		89	
2 3/4	195		169		138		97	
2 7/8	212		183		150		106	
3	230		199		162		115	
3 1/8	247		214		175		124	
3 1/4	266		230		188		133	
3 3/8	286		247		202		143	
3 1/2	305		264		215		152	

- Rated capacities basket hitch based on D/d ratio of 25
- Rated capacities based on pin diameter no larger than natural eye width or less than the nominal sling diameter
- Rated capacities based on design factor of 5
- Horizontal sling angles less than 30 degrees shall not be used
- Rated capacities based on new slings only

Wire Rope Technical Board - Wire Rope Users Manual, Fourth Edition • 97

