


## TYPE 4

### All Purpose Slings Tapered Sleeve & Attachments

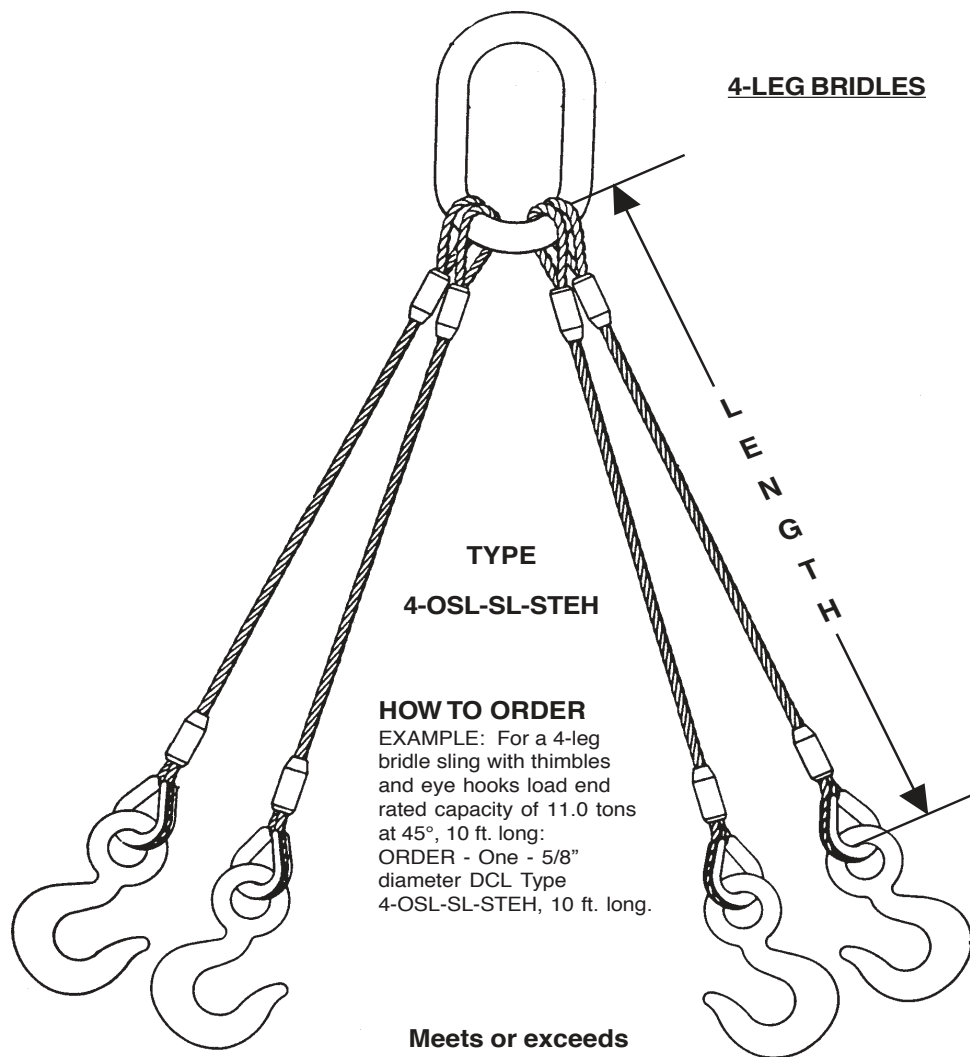

#### HOW TO ORDER

EXAMPLE: For a 4-leg bridle sling with thimbles and eye hooks load end rated capacity of 11.0 tons at 45°, 10 ft. long:  
ORDER - One - 5/8" diameter DCL Type 4-OSL-SL-STEH, 10 ft. long.

- Meets or exceeds
- OSHA Standards
  - API Standards
  - ASME Standards

## TYPE 4

### Mechanical Splice - IWRC

#### 4 - Leg Bridle

Rated capacity in tons of 2,000 lbs.

Rated capacities shown apply only to 6x19 and 6x37 class wire rope

ROPE DIA. (IN.)	VERTICAL		60°		45°		30°	
	EIPS	EEIPS	EIPS	EEIPS	EIPS	EEIPS	EIPS	EEIPS
1/4	2.6	2.8	2.2	2.4	1.8	2.0	1.3	1.4
5/16	4.0	4.4	3.5	3.8	2.8	3.1	2.0	2.2
3/8	5.7	6.3	5.0	5.5	4.1	4.5	2.9	3.2
7/16	7.8	8.5	6.7	7.4	5.5	6.0	3.9	4.3
1/2	10	11	8.8	9.6	7.1	7.8	5.1	5.5
9/16	13	14	11	12	9.0	9.9	6.4	7.0
5/8	16	17	14	15	11	12	7.8	8.6
3/4	22	25	19	21	16	17	11	12
7/8	30	33	26	29	21	24	15	17
1	39	43	34	37	28	31	20	22
1 1/8	48		42		34		24	
1 1/4	59		51		42		30	
1 3/8	71		62		50		36	
1 1/2	84		73		60		42	
1 5/8	98		85		69		49	
1 3/4	113		98		80		57	
1 7/8	129		112		91		64	
2	147		127		104		73	
2 1/8	159		138		113		80	
2 1/4	178		154		126		89	
2 3/8	197		171		139		99	
2 1/2	217		188		154		109	
2 5/8	238		206		169		119	
2 3/4	260		225		184		130	
2 7/8	282		244		200		141	
3	306		265		216		153	
3 1/8	330		286		233		165	
3 1/4	354		307		250		177	
3 3/8	381		330		269		190	
3 1/2	406		352		287		203	

- Rated capacities basket hitch based on D/d ratio of 25
- Rated capacities based on pin diameter no larger than natural eye width or less than the nominal sling diameter
- Rated capacities based on design factor of 5
- Horizontal sling angles less than 30 degrees shall not be used
- Rated capacities based on new slings only

Wire Rope Technical Board - Wire Rope Users Manual, Fourth Edition • 97

