


## Zinc and/or Resin POURED SOCKETS IWRC & Fiber Core





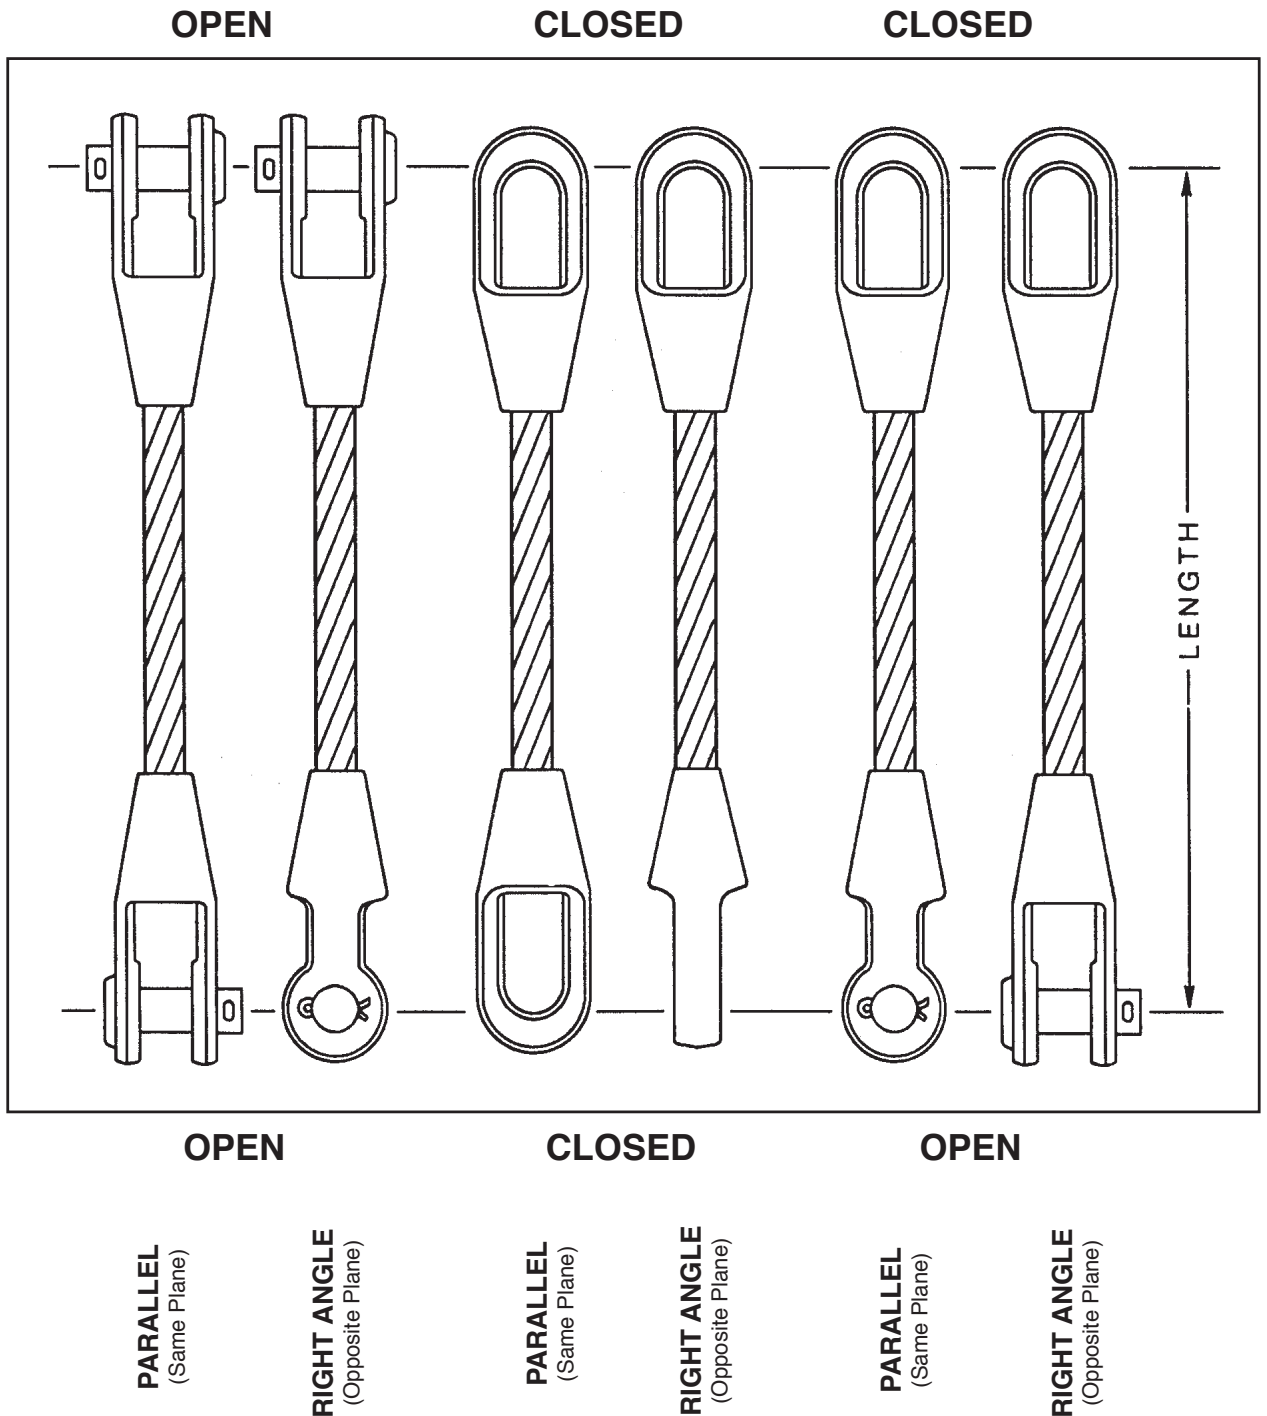

## POURED SOCKETS - Zinc and/or Resin IWRC & Fiber Core

### Vertical or Vertical Basket

Rated capacity in tons of 2,000 lbs.

Rated capacities shown apply only to 6x19 and 6x37 class wire rope

ROPE DIA. (IN.)	Fiber Core		IWRC				ROPE DIA. (IN.)
	VERTICAL	VERT. BASKET	VERTICAL		VERT. BASKET		
					EIPS	EEIPS	
1/4	0.60	1.1	0.68	0.74	1.3	1.4	1/4
5/16	0.94	1.7	1.1	1.2	1.9	2.1	5/16
3/8	1.3	2.5	1.5	1.7	2.8	3.1	3/8
7/16	1.8	3.4	2.0	2.2	3.8	4.1	7/16
1/2	2.4	4.4	2.7	2.9	4.9	5.4	1/2
9/16	3.0	5.5	3.4	3.7	6.2	6.8	9/16
5/8	3.7	6.8	4.1	4.5	7.6	8.4	5/8
3/4	5.2	9.7	5.9	6.5	11	12	3/4
7/8	7.1	13	8.0	8.8	15	16	7/8
1	9.2	17	10	11	19	21	1
1 1/8	12	21	13	14	24	26	1 1/8
1 1/4	14	26	16	18	30	33	1 1/4
1 3/8	17	32	19	21	36	39	1 3/8
1 1/2	20	37	23	25	42	46	1 1/2
1 5/8	24	44	26	29	49	54	1 5/8
1 3/4	27	50	31	34	57	63	1 3/4
1 7/8	31	57	35	38	64	71	1 7/8
2	35	65	40	43	73	80	2
2 1/8	39	73	44	49	82	90	2 1/8
2 1/4	44	81	49	54	91	101	2 1/4
2 3/8	49	90	55	60	101	112	2 3/8
2 1/2	54	99	60	66	112	123	2 1/2
2 5/8			66	73	122	135	2 5/8
2 3/4			72	79	134	147	2 3/4
2 7/8			78	86	145	160	2 7/8
3			85	94	157	173	3
3 1/8			92	101	169	187	3 1/8
3 1/4			98	108	182	201	3 1/4
3 3/8			106	116	196	215	3 3/8
3 1/2			113	124	209	230	3 1/2
3 3/4			***				
4			***				

- Rated capacities basket hitch based on D/d ratio of 25
- Rated capacities based on pin diameter no larger than natural eye width or less than the nominal sling diameter
- Rated capacities based on design factor of 5
- Horizontal sling angles less than 30 degrees shall not be used
- Rated capacities based on new slings only

\*\*\* UPON REQUEST

