



8 Part Braided Choker Slings Tapered Sleeve & Attachments

CHOKER

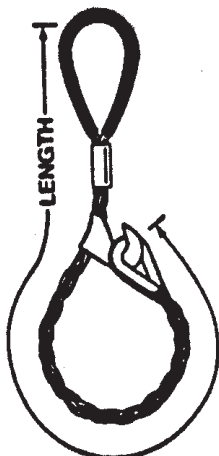

2-LEG CHOKER

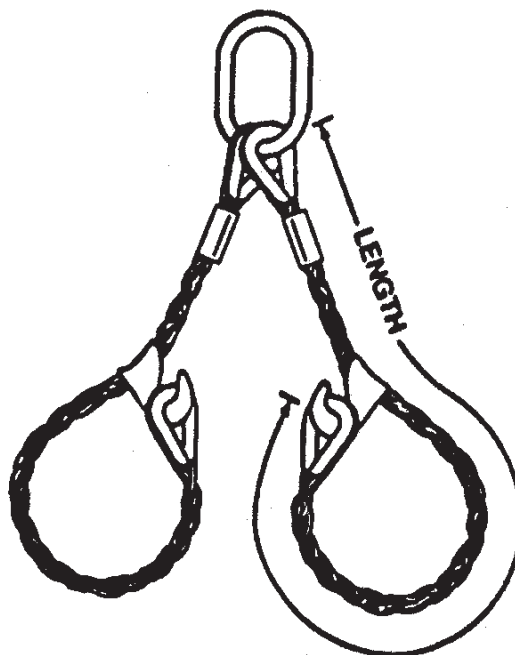

HOW TO ORDER

EXAMPLE: For a 2-leg choker sling, with sliding hooks with a rated capacity of 3.8 tons, 15 ft. long, used as illustrated:

ORDER - One - DCL type 1/4" size B-2-OSL-ST-SCH-ST.

HOW TO ORDER

EXAMPLE: For a single leg choker with a sliding choker hook with a rated capacity of 1.5 tons, 10 ft. long, used as illustrated.

ORDER - One - 3/16" size DCL type B-1-SL-SCH-ST, 10 ft. long

RATED CAPACITIES FOR 8 PART BRAIDED CHOKER SLING
7 x 7 and 7 x 19 Galvanized Aircraft Wire Rope
6 x 19 and 6 x 37 EIP IWRC Wire Rope



These Choker Slings are used when maximum flexibility and ease of handling are essential for a sling which is to be attached to the load with a choker hitch.



The extra flexibility of this type of sling permits the maximum frictional holding power between the sling and load.

8 PART BRAIDED SLING
Round Body

8 ROPES OF THIS DIAMETER are braided together in spiral construction to form the sling body.

Rated capacity based on NEW slings only.

RATED CAPACITIES (TONS 2000 LB) Design Factor 5 to 1

Diameter in Inches Each Part	FINISHED BODY DIA. (IN.)	UPPER LINK		SWAGE LOOP		Stock Dia. Inches	Width	Length
		1 LEG	2 LEG 45°	Width	Length			
								
3/16	13/16	1.5	2.1	3	6	3/4	2 3/4	5 1/2
1/4	1 1/8	2.7	3.8	4	8	1	3 1/2	7
5/16	1 3/8	4.2	5.9	5	10	1 1/4	4 3/8	8 3/4
3/8	1 11/16	6.0	8.5	6	12	1 1/2	5 1/4	10 1/2
7/16	2	8.1	11	7	14	1 1/2	5 1/4	10 1/2
1/2	2 1/4	10	15	8	16	1 3/4	6	12
9/16	2 1/2	13	19	9	18	1 3/4	6	12
5/8	2 13/16	16	23	10	20	2	7	14

