

## Competitively-Priced Roundslings

DCL fabricates and stores a variety of Roundslings for numerous applications.

### Round Slings Characteristics

The Roundsling is a major advancement in securing almost any object to be pulled or lifted. It consists of a continuous, or endless, loop of fiber.

The accumulation of numerous fiber stands and Fiber type determines the strength factor.

The multiple fiber construction makes the roundsling soft and flexible -- perfect for a choked lift. The sling contours itself around the load.

The bundle of fibers is protected by a cover of woven polyester fabric. Because the load bearing fibers never come in contact with the load, there is no damage to them as long as the cover remains intact. In addition, the endless roundsling can be constantly rotated, further extending the wear life of the protective covering and the sling as a whole. Various cover types are available.

**Lifting Fibers** - Endless loops of polyester load bearing yarn

**Label** - Plastic or leather available - Private labeling also

**Capacities** - 3000 pounds to 60,000 pounds vertical rated capacity

**Design Factor** - 5 to 1

**Colors** - Wide variety available (including BLACK for stage rigging)

**Configurations** - Roundslings or eye-and-eye



**Applications** - Vertical, basket or choker

**Cover** - Polyester outer cover with inner red polyester sleeve

- Plain Polyester

- Unique Clear Cover (Inspectable)

**Outer Cover** - Cordura® outer covers also available for more abrasion resistance Nomex® outer covers also available for heat protection

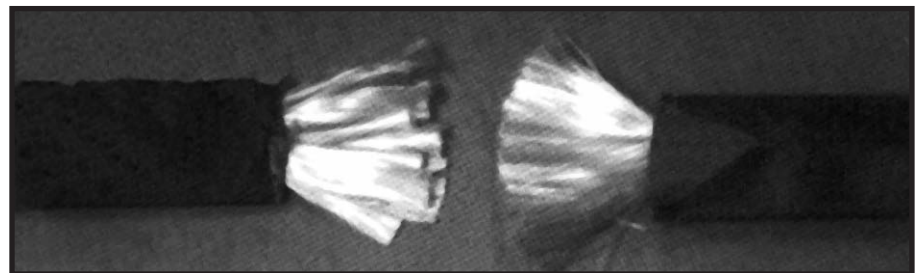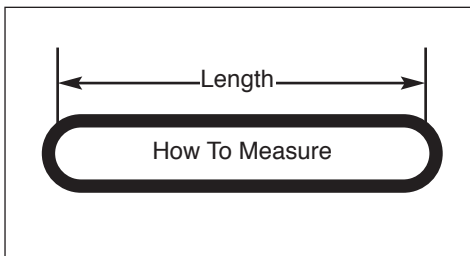

### SINGLE-PATH ROUND SLINGS

CODE	COLOR	RATED CAPACITIES (LBS.)			WIDTH	Approx. Weight lbs. per ft.
		VERTICAL	CHOKER	BASKET		
SP300	Purple	3,000	2,400	6,000	2"	.30
SP450	Black	4,500	3,600	9,000	2"	.45
SP600	Green	6,000	4,800	12,000	2"	.48
SP900	Yellow	9,000	7,200	18,000	2"	.70
SP1200	Gray	12,000	9,600	24,000	3"	.90
SP1400	Red	14,000	11,200	28,000	3"	.95
SP1700	Brown	17,000	13,600	34,000	3"	1.20
SP2200	Blue	22,000	17,600	44,000	3"	1.40
SP2600	Orange	26,000	20,800	52,000	4"	1.70
SP3200	Orange	32,000	25,600	64,000	4"	1.90
SP5000	Orange	50,000	40,000	100,000	5"	2.70
SP6000	Orange	60,000	48,000	120,000	5"	3.00



**WARNING**  
Can fail if damaged, misused or overloaded. Inspect before use. Use only if trained. Observe rated capacity. Avoid sharp edges and exposure to acid, alkali, sunlight and temperature over 194°F. DEATH or INJURY can occur from improper use or maintenance.