

# Eye & Eye Webbing Sling





## EYE AND EYE TYPE


### (LOOP & LOOP TYPE)

An eye (or loop) at each end of this type sling makes it ideal for use as a basket hitch. Also, by passing one eye around the load and through the other eye creates a choker hitch

#### TYPE III

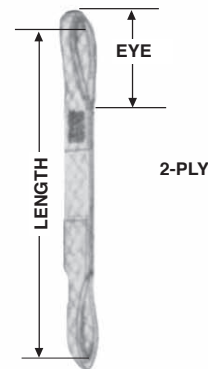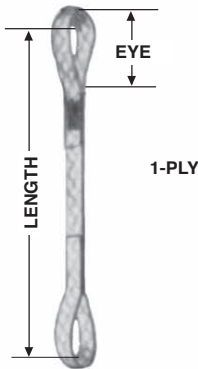

TAPERED EYES STANDARD ON SLINGS 3" AND WIDER. FLAT EYES AND TURNED EYES CAN BE FURNISHED AT NO EXTRA COST. EYE WIDTH IS APPROXIMATELY 1/3 OF SLING WIDTH. WIDER SLINGS AVAILABLE.

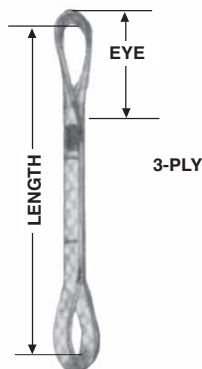

TURNED EYES AVAILABLE ON SLING WIDTHS 2" AND LESS.

#### TYPE IV

REMEMBER TO SPECIFY LENGTH AND CODE NUMBER. OVERSIZED EYES AVAILABLE.

RATED CAPACITY (LBS)						
WIDTH INCHES	NUMBER PLYS	EYE SIZE	VERTICAL	CHOKER	BASKET	CODE NUMBER
1	1	8	1100	880	2200	6B-EE
1	2	8	2200	1760	4400	6DB-EE
1	3	9	3540	2830	7080	6TB-EE
1	4	9	4680	3740	9360	6QB-EE
1	1	8	1600	1280	3200	9B-EE
1	2	8	3200	2480	6200	9DB-EE
1	3	9	4720	3770	9440	9TB-EE
1	4	9	5500	4400	11000	9QB-EE
2	1	9	2200	1760	4400	6I-EE
2	2	9	4400	3520	8800	6DI-EE
2	3	10	6960	5560	13920	6TI-EE
2	4	10	9120	7290	18240	6QI-EE
2	1	9	3100	2480	6200	9I-EE
2	2	9	6200	4960	12400	9DI-EE
2	3	10	9280	7420	18560	9TI-EE
2	4	10	11000	8800	22000	9QI-EE
3	1	10	3300	2640	6600	6M-EE
3	2	10	6600	5280	13200	6DM-EE
3	3	12	9990	7990	19980	6TM-EE
3	4	12	13320	10650	26640	6QM-EE
3	1	10	4700	3760	9400	9M-EE
3	2	10	8800	7040	17600	9DM-EE
3	3	12	13320	10650	26640	9TM-EE
3	4	12	16400	13120	32800	9QM-EE
4	1	12	4400	3520	8800	6P-EE
4	2	12	8200	6560	16400	6DP-EE
4	3	16	12960	10360	25920	6TP-EE
4	4	16	17280	13820	34560	6QP-EE
4	1	12	6200	4960	12400	9P-EE
4	2	12	11000	8800	22000	9DP-EE
4	3	16	17280	13820	34560	9TP-EE
4	4	16	20400	16320	40800	9QP-EE
6	1	18	6600	5280	13200	6V-EE
6	2	18	12300	9840	24600	6DV-EE
6	3	20	18360	14680	36720	6TV-EE
6	4	20	24480	19580	48960	6QV-EE
6	1	18	9300	7440	18600	9V-EE
6	2	18	16500	13200	33000	9DV-EE
6	3	20	24480	19580	48960	9TV-EE
6	4	20	30600	24480	61200	9QV-EE
8	1	20	11800	9440	23600	9W-EE
8	2	20	22700	18160	45400	9DW-EE
8	3	24	30720	24570	61440	9TW-EE
8	4	24	40960	32760	81920	9QW-EE
10	1	22	14700	11760	29400	9X-EE
10	2	22	28400	22720	56800	9DX-EE
10	3	24	36000	28800	72000	9TX-EE
10	4	24	48000	38400	96000	9QX-EE
12	1	24	17600	14080	35200	9Y-EE
12	2	24	34100	27280	68200	9DY-EE
12	3	26	40320	32250	80640	9TY-EE
12	4	26	53760	43000	107520	9QY-EE

#### WARNING

- Sling's rated capacity is based on new sling only.
- Do not exceed rated capacity.

- Keep away from heat and sharp edges, use corner protectors.
- Meets or exceeds OSHA & ASME B30.9C Standards.

