


Nylon Webbing Slings

Nylon webbing is an extremely strong yet flexible material that shapes itself around loads to safely handle the most difficult and demanding jobs


ENDLESS TYPE (GROMMET TYPE)

The most popular sling type since it can be adapted to most applications. Can be used in a choker, vertical or basket hitch.

TYPE V

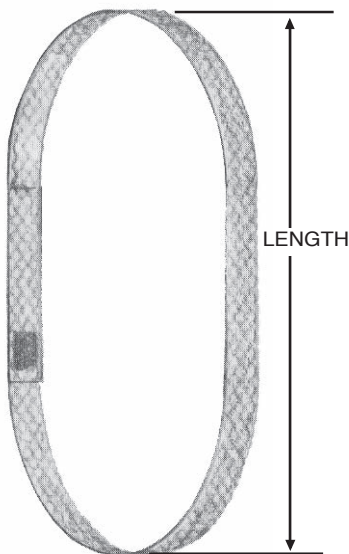

ENDLESS TYPE IN VERTICAL CHOKER BASKET HITCH

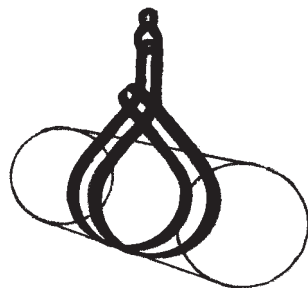

RATED CAPACITY (LBS)

| WIDTH INCHES | NUMBER PLIES | RATED CAPACITY (LBS) | | | CODE NUMBER |
|--------------|--------------|----------------------|----------|--------|-------------|
| | | CHOKER | VERTICAL | BASKET | |
| 1 | 1 | 1920 | 2400 | 4800 | 6B-EN |
| 1 | 2 | 3840 | 4800 | 9600 | 6DB-EN |
| 1 | 3 | 5660 | 7080 | 14160 | 6TB-EN |
| 1 | 4 | 7480 | 9360 | 18720 | 6QB-EN |
| 1 | 1 | 2560 | 3200 | 6400 | 9B-EN |
| 1 | 2 | 5120 | 6400 | 12800 | 9DB-EN |
| 1 | 3 | 7550 | 9440 | 18880 | 9TB-EN |
| 1 | 4 | 9980 | 12480 | 24960 | 9QB-EN |
| 2 | 1 | 3840 | 4800 | 9600 | 6I-EN |
| 2 | 2 | 7680 | 9600 | 19200 | 6DI-EN |
| 2 | 3 | 11360 | 13920 | 27840 | 6TI-EN |
| 2 | 4 | 14590 | 18240 | 36480 | 6QI-EN |
| 2 | 1 | 5120 | 6400 | 12800 | 9I-EN |
| 2 | 2 | 10240 | 12800 | 25600 | 9DI-EN |
| 2 | 3 | 14840 | 18560 | 37120 | 9TI-EN |
| 2 | 4 | 19450 | 24320 | 48640 | 9QI-EN |
| 3 | 1 | 5760 | 7200 | 14400 | 6M-EN |
| 3 | 2 | 10650 | 13320 | 26640 | 6DM-EN |
| 3 | 3 | 15980 | 19980 | 39960 | 6TM-EN |
| 3 | 4 | 21300 | 26640 | 53280 | 6QM-EN |
| 3 | 1 | 7680 | 9600 | 19200 | 9M-EN |
| 3 | 2 | 14200 | 17760 | 35520 | 9DM-EN |
| 3 | 3 | 21300 | 26640 | 53280 | 9TM-EN |
| 3 | 4 | 28410 | 35520 | 71040 | 9QM-EN |
| 4 | 1 | 7680 | 9600 | 19200 | 6P-EN |
| 4 | 2 | 13820 | 17280 | 34560 | 6DP-EN |
| 4 | 3 | 20730 | 25920 | 51840 | 6TP-EN |
| 4 | 4 | 27640 | 34560 | 69120 | 6QP-EN |
| 4 | 1 | 10240 | 12800 | 25600 | 9P-EN |
| 4 | 2 | 18430 | 23040 | 46080 | 9DP-EN |
| 4 | 3 | 27640 | 34560 | 69120 | 9TP-EN |
| 4 | 4 | 36860 | 46080 | 92160 | 9QP-EN |
| 6 | 1 | 11520 | 14400 | 28800 | 6V-EN |
| 6 | 2 | 19580 | 24480 | 48960 | 6DV-EN |
| 6 | 3 | 29370 | 36720 | 73440 | 6TV-EN |
| 6 | 4 | 39160 | 48960 | 97920 | 6QV-EN |
| 6 | 1 | 15360 | 19200 | 38400 | 9V-EN |
| 6 | 2 | 26110 | 32640 | 65280 | 9DV-EN |
| 6 | 3 | 39160 | 48960 | 97920 | 9TV-EN |
| 6 | 4 | 52220 | 65280 | 130560 | 9QV-EN |
| 8 | 1 | 20480 | 25600 | 51200 | 9W-EN |
| 8 | 2 | 32760 | 40960 | 81920 | 9DW-EN |
| 8 | 3 | 49150 | 61440 | 122880 | 9TW-EN |
| 8 | 4 | 65530 | 81920 | 163840 | 9QW-EN |
| 10 | 1 | 25600 | 32000 | 64000 | 9X-EN |
| 10 | 2 | 38400 | 48000 | 96000 | 9DX-EN |
| 10 | 3 | 57600 | 72000 | 144000 | 9TX-EN |
| 10 | 4 | 76800 | 96000 | 192000 | 9QX-EN |
| 12 | 1 | 30720 | 38400 | 76800 | 9Y-EN |
| 12 | 2 | 43000 | 53760 | 107520 | 9DY-EN |
| 12 | 3 | 64510 | 80640 | 161280 | 9TY-EN |
| 12 | 4 | 86000 | 107520 | 215040 | 9QY-EN |

WARNING

- Sling's rated capacity is based on new sling only.
- Do not exceed rated capacity.
- Keep away from heat and sharp edges, use corner protectors.
- Meets or exceeds OSHA & ASME B30.9C Standards.