
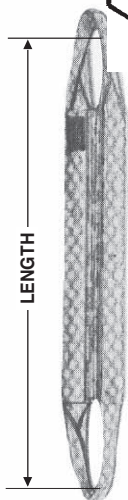



Nylon Webbing Slings

CARGO TYPE FLAT AND TAPERED EYE

Cargo type or flat and tapered eyes allow use of wide slings on small crane hook-



STYLE 1 CONSTRUCTION

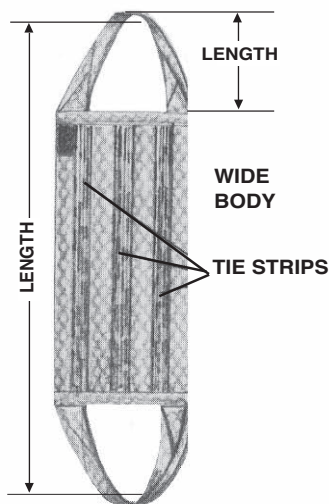

STYLE 3 CONSTRUCTION

*EYE LENGTHS APPROXIMATELY 1-1/2 TIMES SLING WIDTH UNLESS OTHERWISE SPECIFIED



WIDTH INCHES	NUMBER PLYS	EYE SIZE	RATED CAPACITY (LBS)			CODE NUMBER
			CHOKER	VERTICAL	BASKET	
6	1	9	5760	7200	14400	6M-CA6
6	1	9	7680	9600	19200	9M-CA6
6	2	9	10650	13320	26640	6DM-CA6
6	2	9	14200	17760	35520	9DM-CA6
8	1	12			19200	6P-CA8
8	1	12			25600	9P-CA8
8	2	12			34560	6DP-CA8
8	2	12			46080	9DP-CA8
10	1	15			24000	6S-CA10
10	1	15			32000	9S-CA10
10	2	15			42000	6DS-CA10
10	2	15			56000	9DS-CA10
12	1	18			28800	6V-CA12
12	1	18			38400	9V-CA12
12	2	18			48960	6DV-CA12
12	2	18			65280	9DV-CA12
9	1	13			14400	6M-CA9
9	1	13			19200	9M-CA9
9	2	13			26640	6DM-CA9
9	2	13			35520	9DM-CA9
12	1	18			19200	6P-CA12
12	1	18			25600	9P-CA12
12	2	18			34560	6DP-CA12
12	2	18			46080	9DP-CA12
15	1	20			24000	6S-CA15
15	1	20			32000	9S-CA15
15	2	20			42000	6DS-CA15
15	2	20			56000	9DS-CA15
18	1	24			28800	6V-CA18
18	1	24			38400	9V-CA18
18	2	24			48960	6DV-CA18
18	2	24			65280	9DV-CA18
12	1	18			14400	6M-CA12
12	1	18			19200	9M-CA12
12	2	18			26640	6DM-CA12
12	2	18			35520	9DM-CA12
16	1	24			19200	6P-CA16
16	1	24			25600	9P-CA16
16	2	24			34560	6DP-CA16
16	2	24			46080	9DP-CA16
20	1	30			24000	6S-CA20
20	1	30			32000	9S-CA20
20	2	30			42000	6DS-CA20
20	2	30			56000	9DS-CA20
24	1	36			28800	6V-CA24
24	1	30			38400	9V-CA24
24	2	36			48960	6DV-CA24
24	2	36			65280	9DV-CA24

WARNING

- Sling's rated capacity is based on new sling only.
- Do not exceed rated capacity.
- Keep away from heat and sharp edges, use corner protectors.
- Meets or exceeds OSHA & ASME B30.9C Standards.