

Crosby® SHUR-LOC® Hooks



Fatigue Rated



S-326A



- Forged Alloy Steel - Quenched and Tempered.
- Individually Proof Tested at 2-1/2 times the Working Load Limit with certification.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- Rated for both Wire Rope and Grade 8 Chain.
- G-414 Heavy Thimble should be used with wire rope slings.
- Trigger repair Kit available (S-4316). Consists of spring, roll pin and trigger.
- S-3326 Swivel Hook utilizes anti-friction bearing design which allows hook to rotate freely under load.
- Fatigue rated.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.550 (g) (4) (iv) (B).
- "Look for the color Gold - Crosby Alloy Hooks".
- U.S. Patent 5,381,650 and foreign equivalents.

S-3326




Use in corrosive environment requires shank and nut inspection in accordance with ASME B30.10-1.2.1(b)(2)(c)2000.

S-326A SHUR-LOC® Swivel Hooks

- Suitable for infrequent, non-continuous rotation under load.

Chain Size		S-326A Stock No.	Grade 8 Alloy Chain Working Load Limit (lbs.) 4:1*	Weight Each (lbs.)	Dimensions (in.)									
(in.)	(mm)				A	B	C	D	E	F	H	J	L	AA
-	6	1004201	2500	1.26	1.50	1.32	6.13	.79	2.60	.67	.50	.63	1.13	1.50
1/4-5/16	7-8	1004210	4500	2.62	1.75	1.59	7.60	1.10	3.50	.87	.63	.81	1.38	2.00
3/8	10	1004223	7100	4.70	2.00	1.73	8.83	1.17	4.39	1.10	.75	.94	1.75	2.50
1/2	13	1004234	12000	8.64	2.50	2.38	11.20	1.67	5.45	1.26	1.00	1.16	2.11	3.00
5/8	16	1004235	18100	17.00	2.75	2.53	12.98	2.05	6.56	1.50	1.13	1.50	2.49	3.50
3/4	18-20	1004244	28300	24.00	2.83	2.52	17.42	2.22	7.76	2.01	1.10	2.03	3.52	5.00
7/8	22	1004254	34200	29.00	3.44	3.19	16.47	2.45	8.75	2.26	1.30	2.20	3.83	6.00

* Ultimate Load is 4 times the Working Load Limit based on Grade 8 Chain.

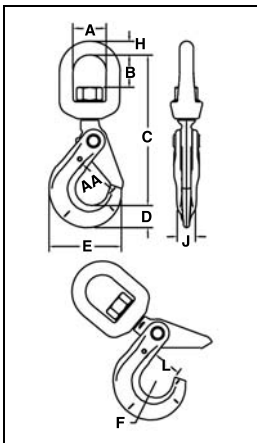


S-3326 SHUR-LOC® Swivel Hooks with Bearing

- Suitable for frequent rotation under load.

Chain Size		S-3326 Stock No.	Grade 8 Alloy Chain Working Load Limit (lbs.) 4:1*	Weight Each (lbs.)	Dimensions (in.)									
(in.)	(mm)				A	B	C	D	E	F	H	J	L	AA
-	6	1028806	2500	1.50	1.14	6.17	.79	2.60	.67	.50	.63	1.13	1.50	
1/4-5/16	7-8	1028815	4500	3.10	1.75	1.52	7.54	1.10	3.50	.87	.63	.81	1.44	2.00
3/8	10	1028824	7100	5.26	2.00	1.61	8.88	1.16	4.35	1.10	.75	.94	1.83	2.50
1/2	13	1028833	12000	11.22	2.50	2.03	11.11	1.66	5.45	1.26	1.00	1.16	2.19	3.00
5/8	16	1028842	18100	17.32	2.75	1.98	12.61	2.05	6.56	1.50	1.13	1.50	2.61	3.50

* Ultimate Load is 4 times the Working Load Limit based on Grade 8 Chain.

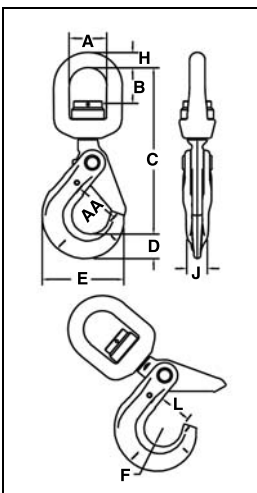

Copyright © 2008 The Crosby Group, Inc.
All Rights Reserved

