

# Slingsmax® Pad Eye Tester

Lightweight, portable tool for testing pad eyes, lifting lugs, and eye bolts. It can be used upright, inverted, or in a horizontal plane. Models are available up to 50 ton proof test capability. Equipped with an adjustable clevis height and large dial capacity readout. Aluminum housing on 10 Ton, 20 Ton, and 30 Ton models.

## Applications


Proof testing pad eyes, lifting lugs, and eye bolts. Can be used upright as pictured, inverted, or in a horizontal plane

## Standard Features

- Light weight and portable
- Assist handles on two sides
- Stainless steel data plate with serial number
- Large dial type capacity readout
- Powder coated finish
- 10ft. polyurethane hose with quick couplers
- Lightweight two-speed hand pump with locking handle
- Proof tested and calibrated
- Carrying case

## Optional Equipment

- Polyurethane hose in 10', 12', 20', and 50' lengths
- Wire-braid rubber hose in 10', 20', 30', and 50' lengths
- Powered pump
- Digital pressure gauge
- Extra clevis and pin
- Carrying case

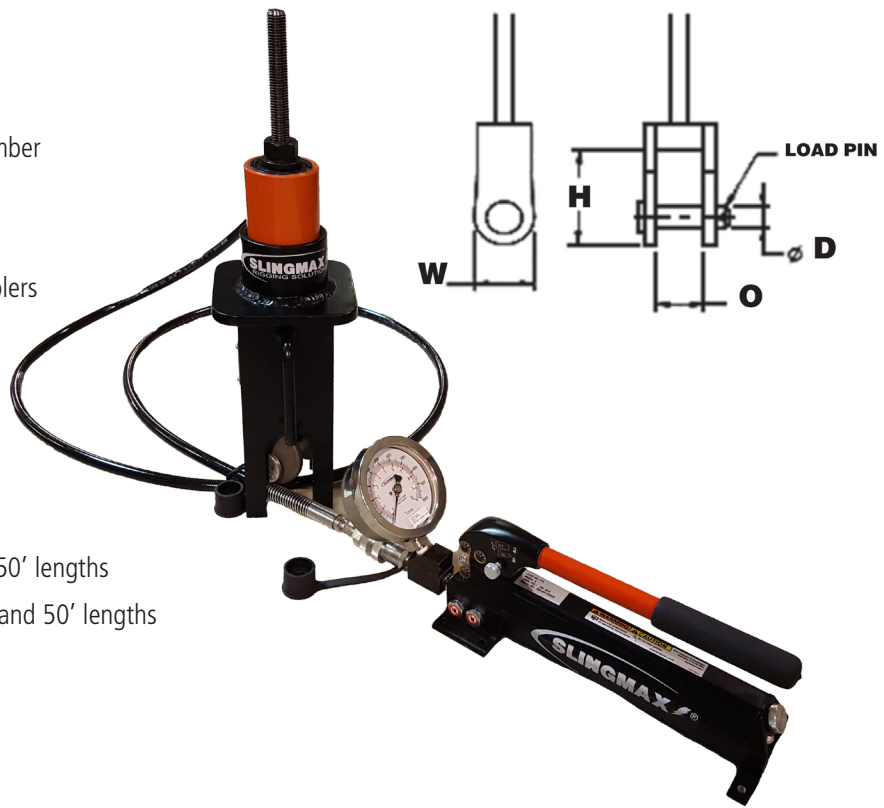

SPECIALTY PRODUCTS & PROGRAMS

Part No.	Capacity (US Tons)	Clevis Dimensions (inches)					Pin Diameter (D)	Weight (lbs.)
		A	B	C	E	F		
PET-010-PC	10	4-5/8	1-13/16	2-7/8	2	3	1"	30
PET-020-PC	20	6-3/16	2	3-3/16	2-1/4	4	2"	65
PET-030-PC	30	8-1/2	3-1/2	5	3	5-1/4	2"	110
PET-050-PC	50	12	2-5/8	6	6-1/2	8-3/4	2-13/16"	600

**WARNING** Inspect before use. Follow OSHA, ANSI B30.9 and Manufacturer's Guidelines. Use by untrained persons is hazardous. Improper use will result in serious injury or death. Do not exceed rated capacity. This product will fail if damaged, abused, misused, overused or improperly maintained.