


SOCKETS Wedge Sockets



DCL PROPRIETARY PRODUCTS

LBNO improved wedge sockets eliminate the pinching and flattening action on the wire rope which is common to many other wedge sockets. LBNO Wedge Sockets grip the wire rope firmly without crushing or overstressing. The secret of this superior gripping power lies in the contour of the ropeway which has been engineered to match that of the wire rope, resulting in three important features: Longer wire rope service life; superior strength in the connection between rope and socket; and, greater safety and protection for both men and equipment. LBNO sockets are complete with flat round-headed pins with cotter keys. Threaded pins and nuts can also be furnished.

When ordering Always Specify **LBNO Quality Wedge Sockets**. All of these advantages have been demonstrated over and over again, by outstanding on-the-job performance.

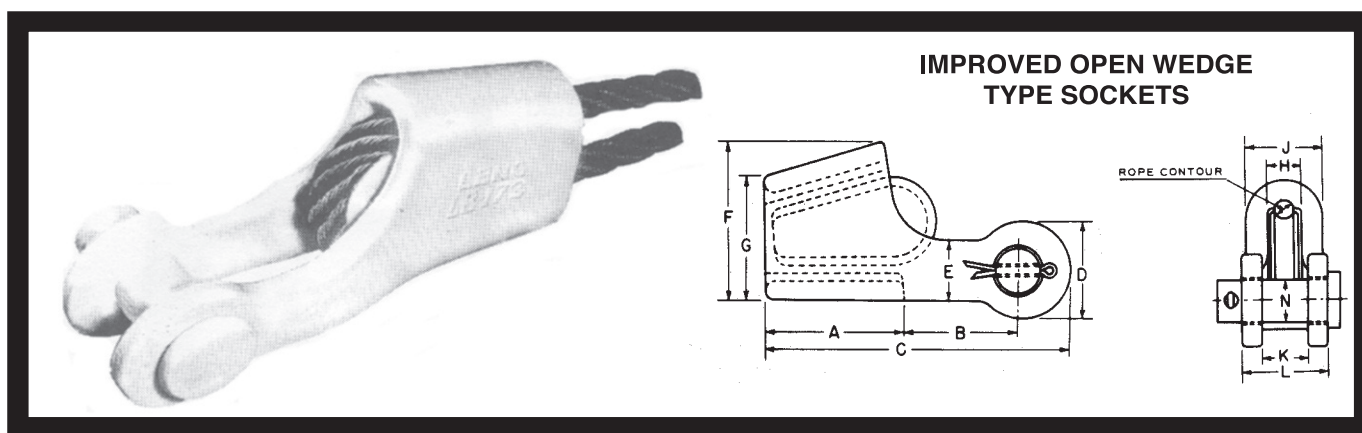

IMPROVED OPEN WEDGE TYPE SOCKETS												CAST STEEL HEAT TREATED			
LBNO* Socket Number Complete	LBNO** Wedge Number	Rope Diameter Inches	DIMENSION IN INCHES											PIN N	Weight Pounds Each Complete
			A	B	C	D	E	F	G	H	J	K	L		
LB-172	LB-172-W	5/16 & 3/8	2 ⁹ / ₁₆	2 ¹ / ₁₆	5 ⁹ / ₁₆	1 ³ / ₄	1 ¹ / ₈	2 ¹³ / ₁₆	2 ¹ / ₄	5/8	1 ³ / ₈	7/8	1 ⁵ / ₈	1 ³ / ₁₆	1.2
LB-173	LB-173-W	7/16 & 1/2	3 ¹ / ₄	2 ⁷ / ₁₆	6 ³ / ₄	2	1 ¹ / ₄	3 ⁷ / ₁₆	2 ¹¹ / ₁₆	3/4	1 ¹ / ₂	1	1 ³ / ₄	1	5
LB-174	LB-174-W	9/16 & 5/8	4 ¹ / ₈	3 ¹ / ₈	8 ⁵ / ₈	2 ¹ / ₂	1 ¹ / ₂	4 ¹ / ₄	3 ⁵ / ₁₆	1	1 ⁷ / ₈	1 ¹ / ₄	2 ¹ / ₈	1 ³ / ₁₆	9 ¹ / ₂
LB-175	LB-175-W	3/4	5 ¹ / ₂	3 ⁷ / ₈	11	3	1 ⁷ / ₈	5 ³ / ₁₆	3 ⁷ / ₈	1 ¹ / ₄	2 ³ / ₈	1 ¹ / ₂	2 ⁵ / ₈	1 ³ / ₈	18 ¹ / ₂
LB-176	LB-176-W	7/8 & 1	6 ³ / ₈	5 ⁵ / ₁₆	13 ⁷ / ₈	4	2 ¹ / ₂	6 ⁵ / ₈	5 ³ / ₁₆	1 ⁵ / ₈	3 ¹ / ₈	2	3 ¹ / ₂	2	37
LB-177	LB-177-W	1 ¹ / ₈ & 1 ¹ / ₄	7	6 ³ / ₁₆	16	5	2 ⁷ / ₈	7 ¹ / ₂	5 ⁷ / ₈	2	3 ⁵ / ₈	2 ¹ / ₂	4 ¹ / ₈	2 ¹ / ₂	59 ¹ / ₂
LB-178	LB-178-W	1 ³ / ₈ & 1 ¹ / ₂	7 ³ / ₄	7 ¹ / ₁₆	18 ¹ / ₈	5 ³ / ₄	3 ¹ / ₄	8 ³ / ₄	6 ⁷ / ₈	2 ³ / ₈	4 ¹ / ₄	3	4 ⁷ / ₈	2 ³ / ₄	94
LB-179	LB-179-W	1 ⁵ / ₈ & 1 ³ / ₄	9	7 ³ / ₄	20 ⁷ / ₈	7 ¹ / ₄	3 ³ / ₄	9 ⁷ / ₈	7 ¹³ / ₁₆	2 ¹ / ₂	4 ¹ / ₂	3 ¹ / ₂	6 ¹ / ₄	3 ¹ / ₂	136 ¹ / ₂
LB-180	LB-180-W	2 & 2 ¹ / ₄	11	10	25 ⁵ / ₈	8	4 ¹ / ₂	13 ¹ / ₈	10 ³ / ₄	3	5 ¹ / ₄	4	6 ¹ / ₂	3 ³ / ₄	241 ¹ / ₂

**Includes Wedge Pin and Cotter Keys

**Wedge Only.

Dimensions are in accordance with Standard Foundry Practice.



ISO Certified

www.dcl-usa.com • email: sales@dcl-usa.com • Fax (504) 947-8557 • 1-800-228-7660